


Installation manual: Wall Cladding

Wall cladding: fixed system

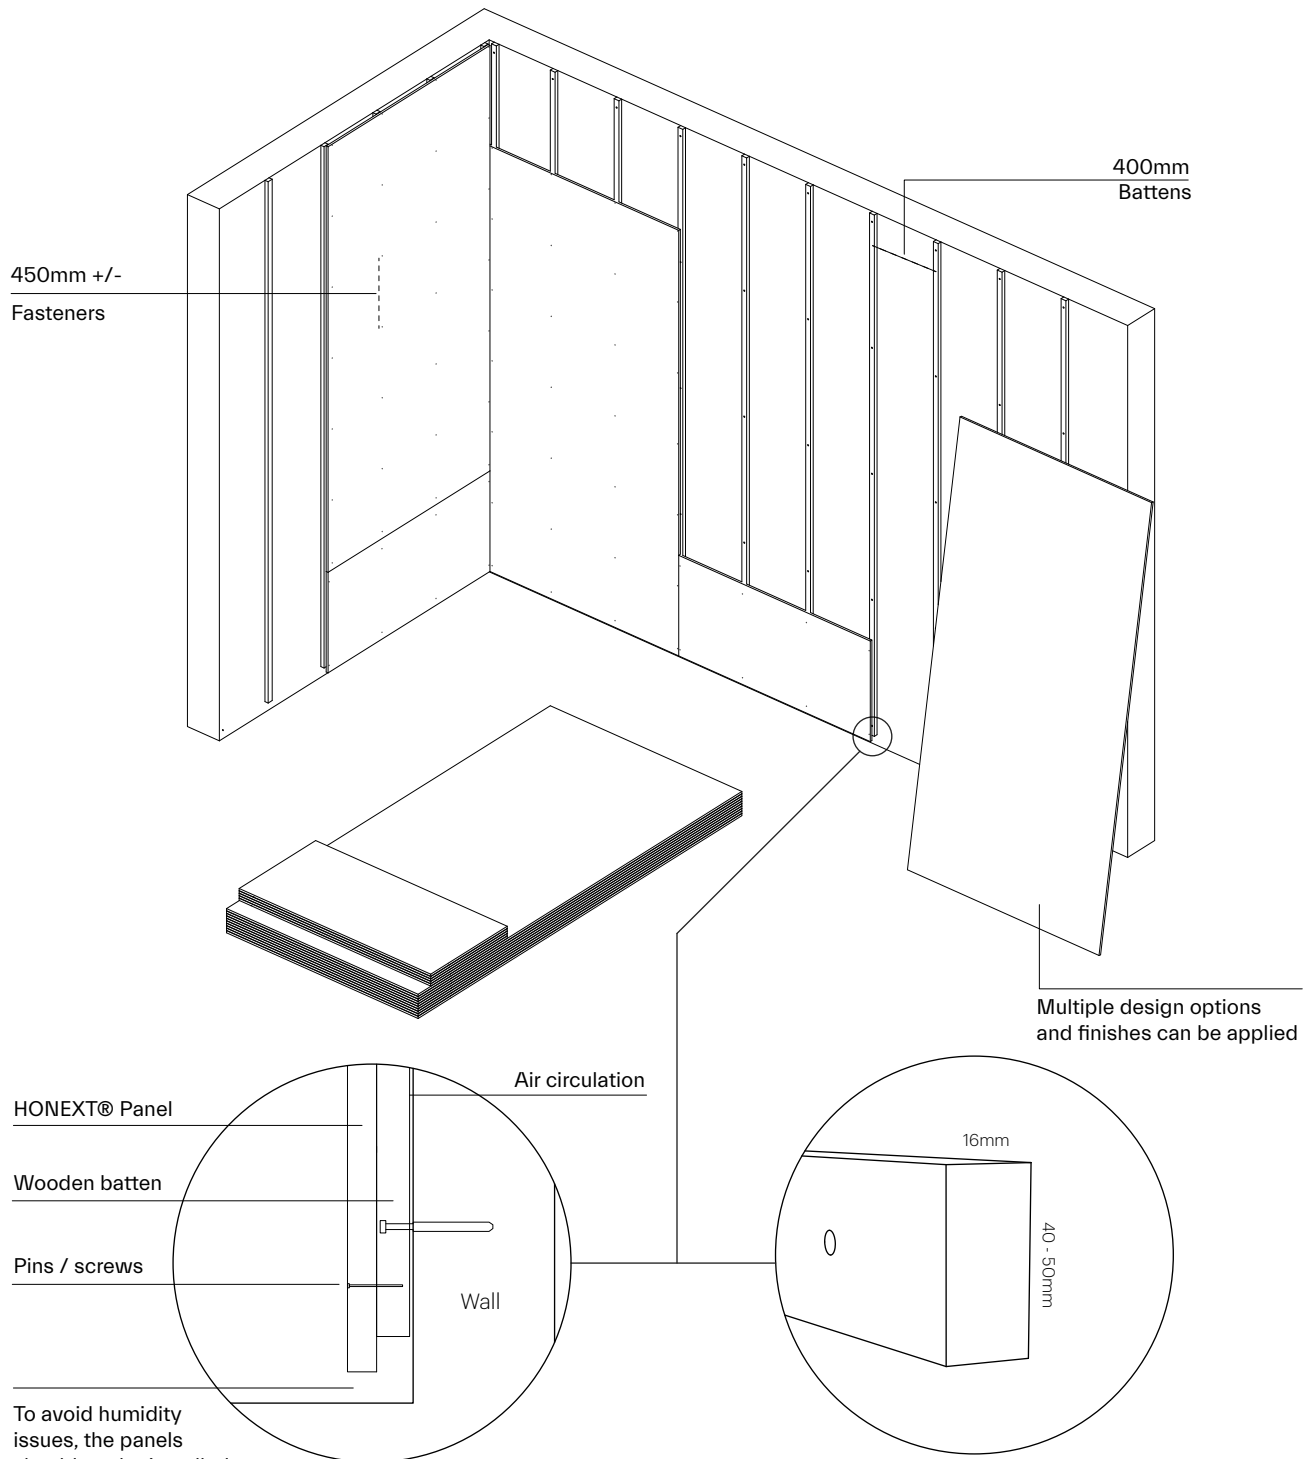


To avoid humidity issues, the panels should not be installed in contact with the floor leaving 15mm +/-

Joinery:


- Wood screws
- Wall plugs
- Pins / Nails

Patterns

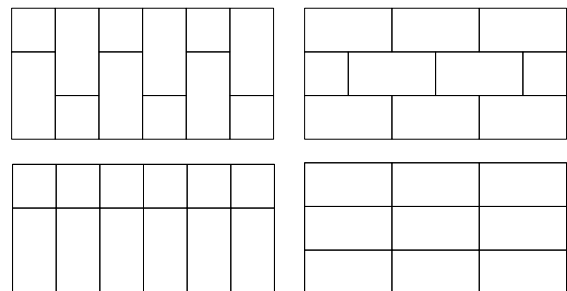

We recommend acclimating the panels to the final temperature and humidity conditions of the room at least 48 hours prior to installation. We also recommend leaving gaps between battens to facilitate air circulation behind the panels. Following EN 318, the linear expansion is homogenous in the panel plane being 2,15mm/m.

Wall cladding: hanging system

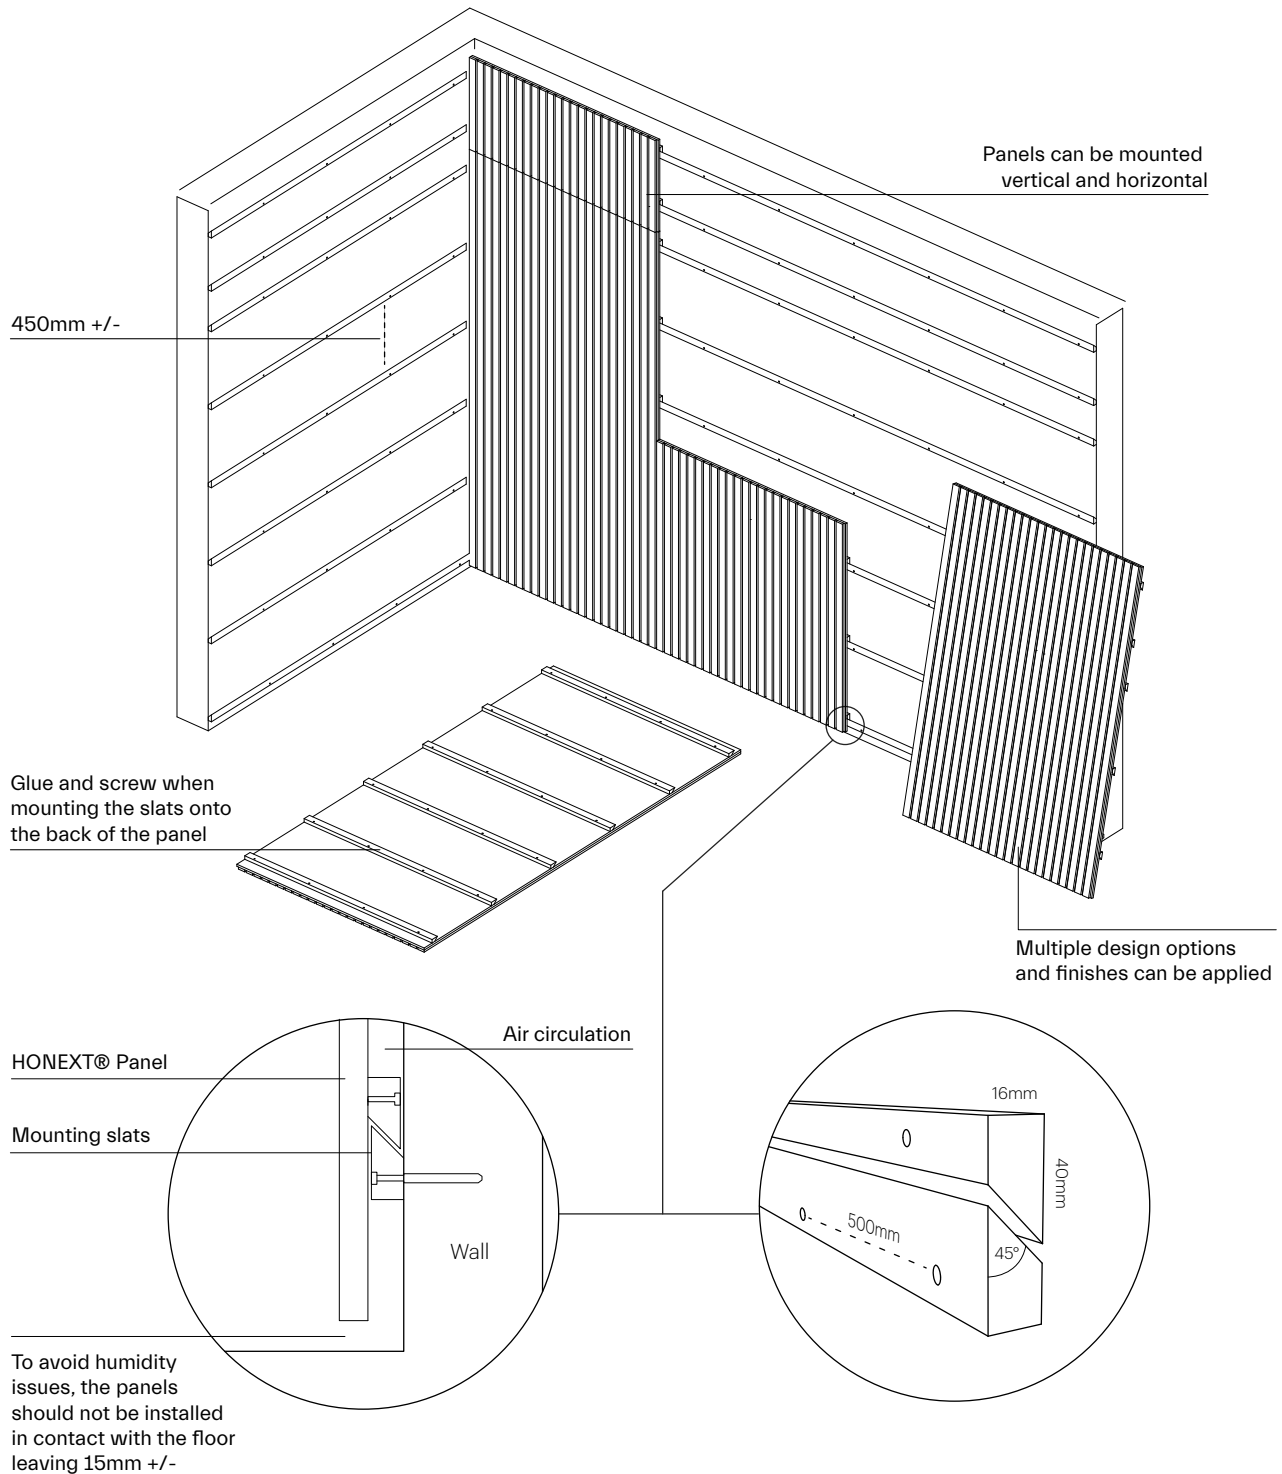

Joinery:

- Wood screws
- Wall plugs
- Non-toxic wood glue

We recommend acclimating the panels to the final temperature and humidity conditions of the room at least 48 hours prior to installation. We also recommend leaving gaps between battens to facilitate air circulation behind the panels. Following EN 318, the linear expansion is homogenous in the panel plane being 2,15mm/m.

Patterns

